



ω Ν ∴

- 1. APPROVED FOR POTABLE WATER USE PER NSF61 AND NSF61 ANNEX G;
 2. MANIFOLDS GROOVED BOTH ENDS TO ALLOW FOR FIELD CONNECTION TO EITHER END.
 3. 48" CLEARANCE (CLEAR TO GROUND) REQUIRED IN FRONT OF CONTROL PANELS PER 2005 NEC.
 TABLE 110-26(A) (1) CATEGORY 3; USER ASSUMES ALL RESPONSIBILITY FOR EVALUATION OF SITE CONDITIONS IF USING CATEGORY 1 OR 2 CLEARANCES.
 4. ALLOW 24" SERVICE CLEARANCE AROUND SYSTEM: ALLOW 12" ABOVE SYSTEM FOR REMOVAL OF MOTOR.
 5. DO NOT USE FOR CONSTRUCTION PURPOSES UNLESS CERTIFIED.
 6. ALL WELDING DONE BY ASME CODE SECTION 9 CERTIFIED WELDERS.
 7. CONDITION POINT: GPM @ PSI
 8. SUCTION PRESSURE: PSI MIN. PSI MAX.
 9. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. ACTUAL DIMENSIONS MAY VARY.
 10. SOME OF THE COMPONENTS NOT SHOWING FOR CLARITY.


"THIS DRAWING AND THE INFORMATION DEPICTED THEREIN IS THE PROPERTY OF PUMP SOLUTIONS INC. COPIES ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF PRODUCTS WITHOUT PRIOR WRITTEN PERMISSION OF PUMP SOLUTIONS INC."

Drawn by:

Checked By:

Revisions

Date Issued:

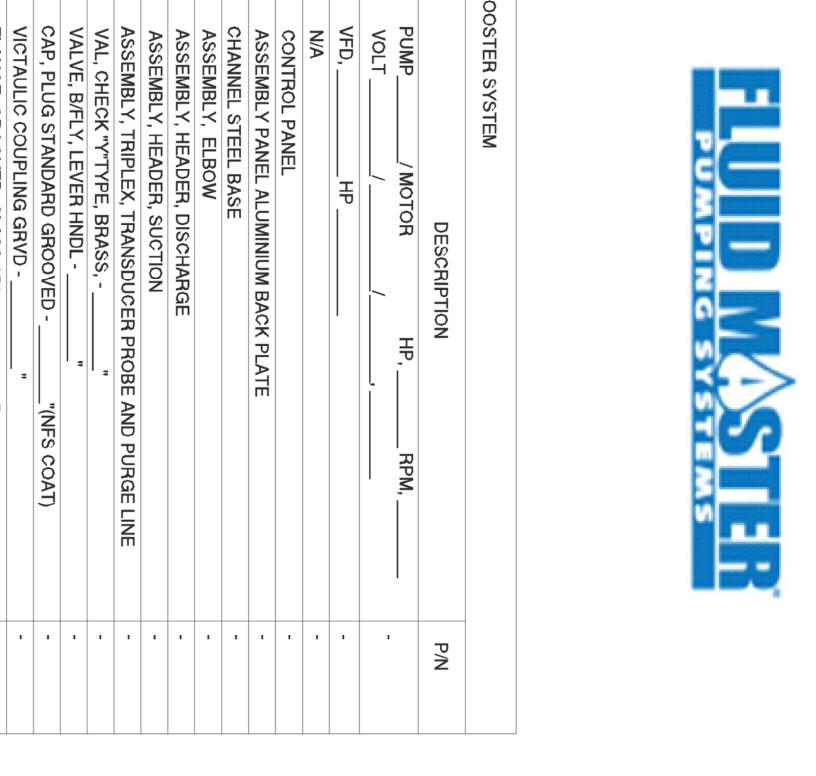

SYM

QTY

PUMP

/ MOTOR

VOLT

VFD,

干

NA


CONTROL PANEL

TRIPLEX PUMP BO

OSTER SYSTEM

N N N O W

FLANGE, GROOVED, CLASS 150, -



Owner

PROJECT No.

13-102

Hollywood, FL 33024 USA Tel: 954 966 8483 Fax: 954.963 Email: engineering@pumpsolutic Web: www.pumpsolutions.us



Building Intelligence Into Pumps

Sheet	D	D	▶	Þ	Δ	Þ	
et							